
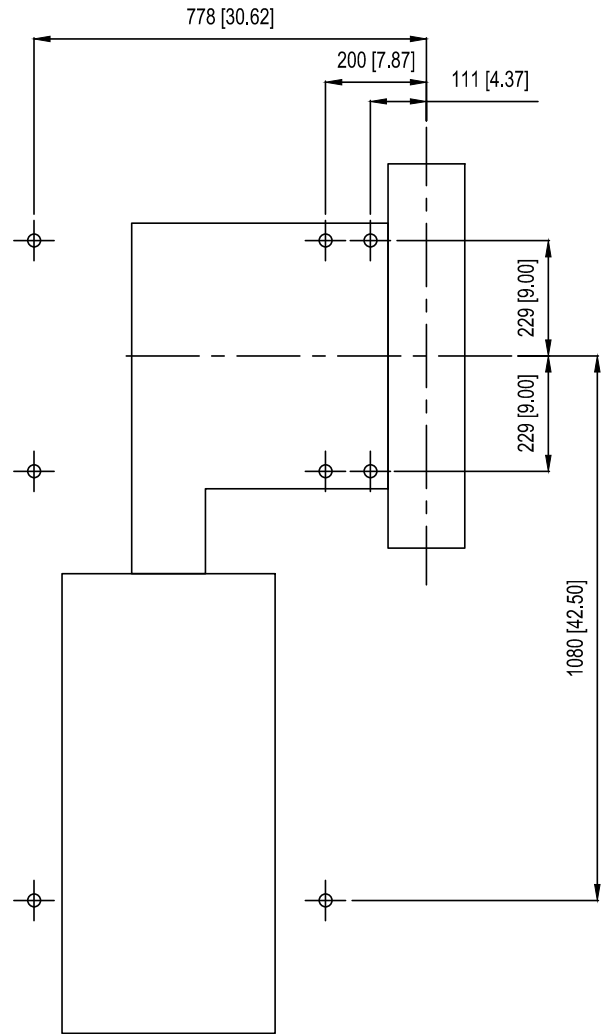


## Otis 6119 BN/BP (8) 1.00" Anchors

Left Hand

Right Hand

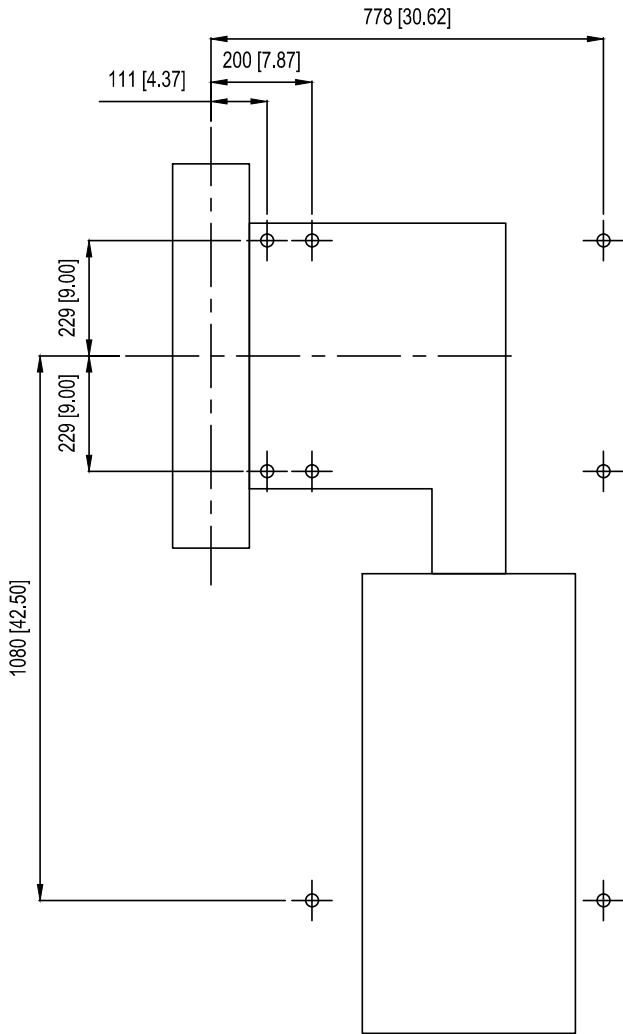

Please confirm all dimensions above are accurate.

All measurements are taken from the sheave centerline and sheave shaft centerline.


SES cannot be held responsible if on-site conditions differ from drawing above unless revised anchor drawing is approved.

### Otis 6176 BG

(6) 1.125" Anchors, (2) 0.75" Anchors

Left Hand

Right Hand

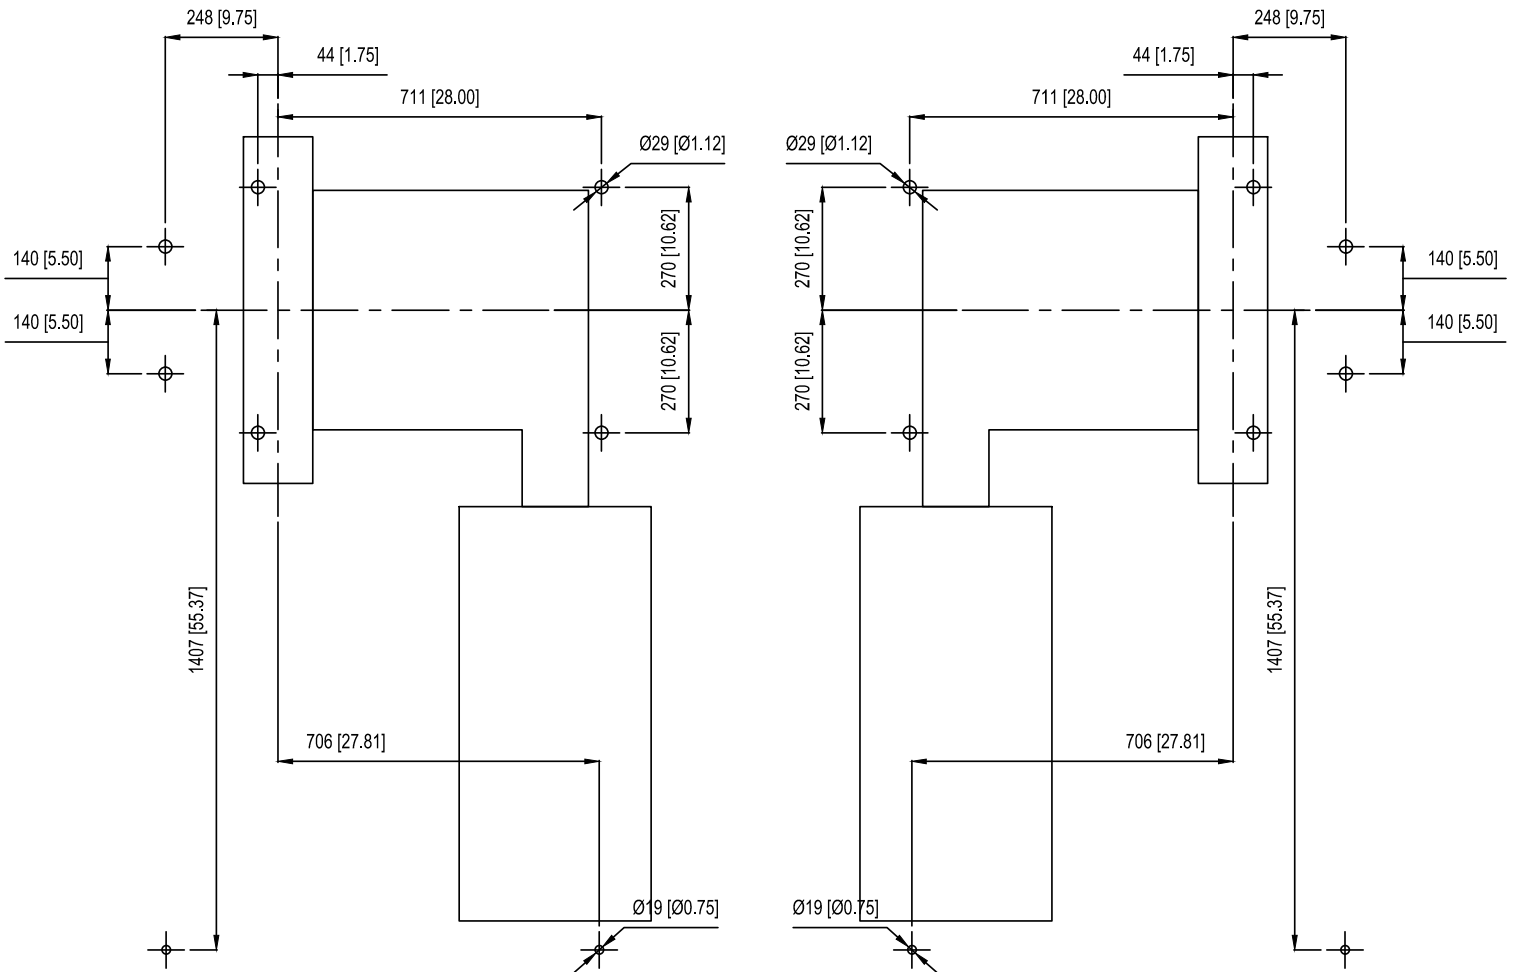

Please confirm all dimensions above are accurate.



All measurements are taken from the sheave centerline and sheave shaft centerline.

SES cannot be held responsible if on-site conditions differ from drawing above unless revised anchor drawing is approved.

## Otis A7078 T (10) 1.25" Anchors

Left Hand

Right Hand

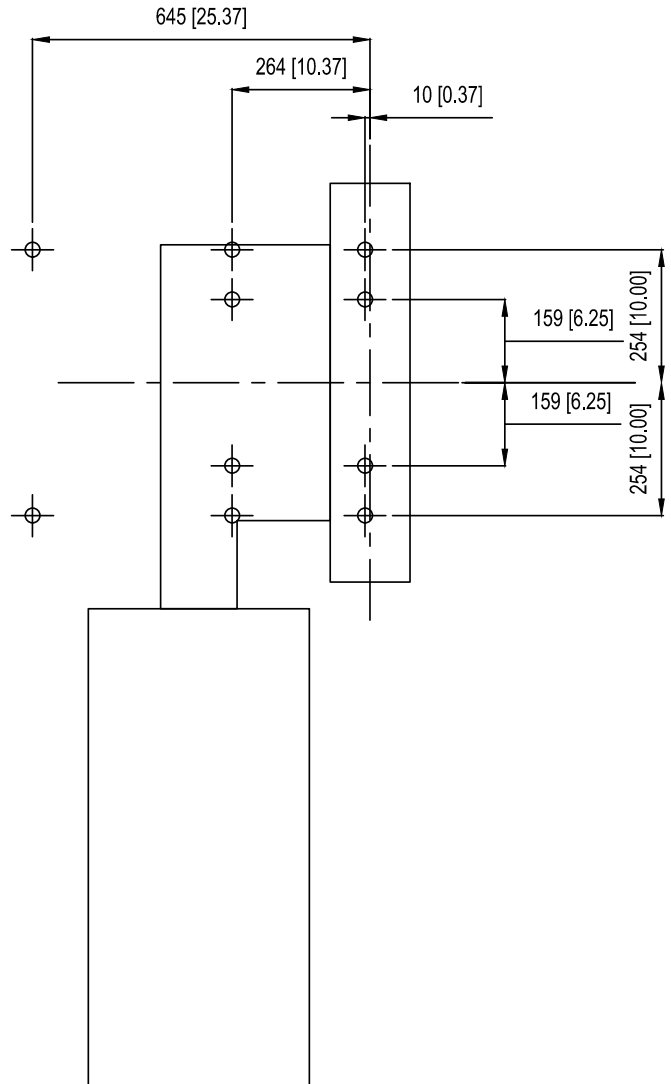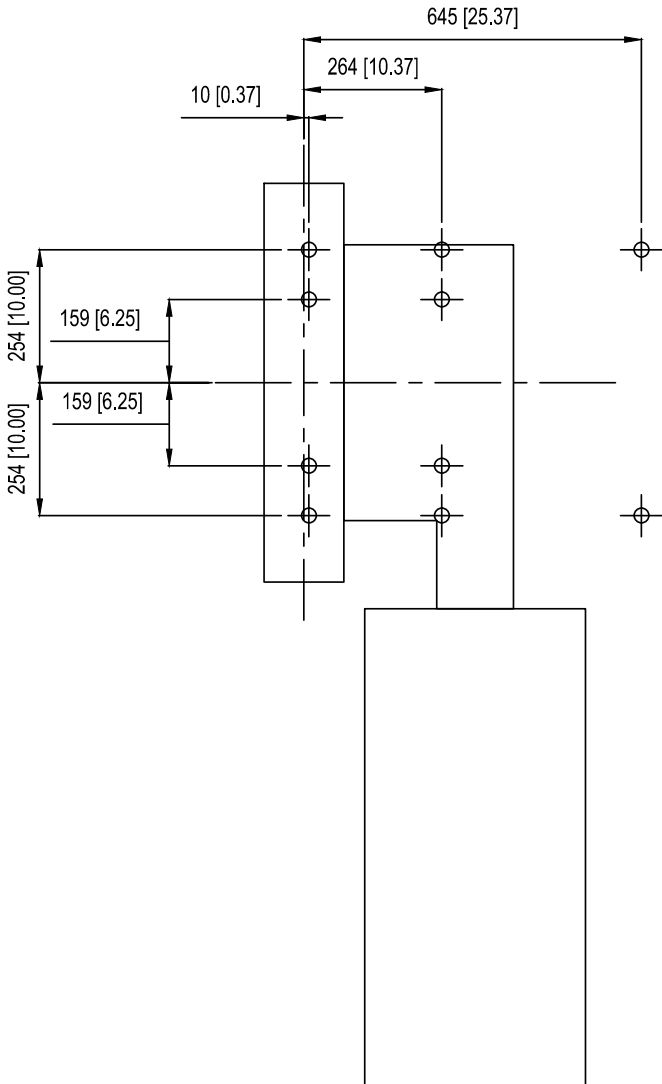

**Please confirm all dimensions above are accurate.**



**All measurements are taken from the sheave centerline and sheave shaft centerline.**

**SES cannot be held responsible if on-site conditions differ from drawing above unless revised anchor drawing is approved.**

## Otis A7116 T (10) 1.25" Anchors

Left Hand

Right Hand

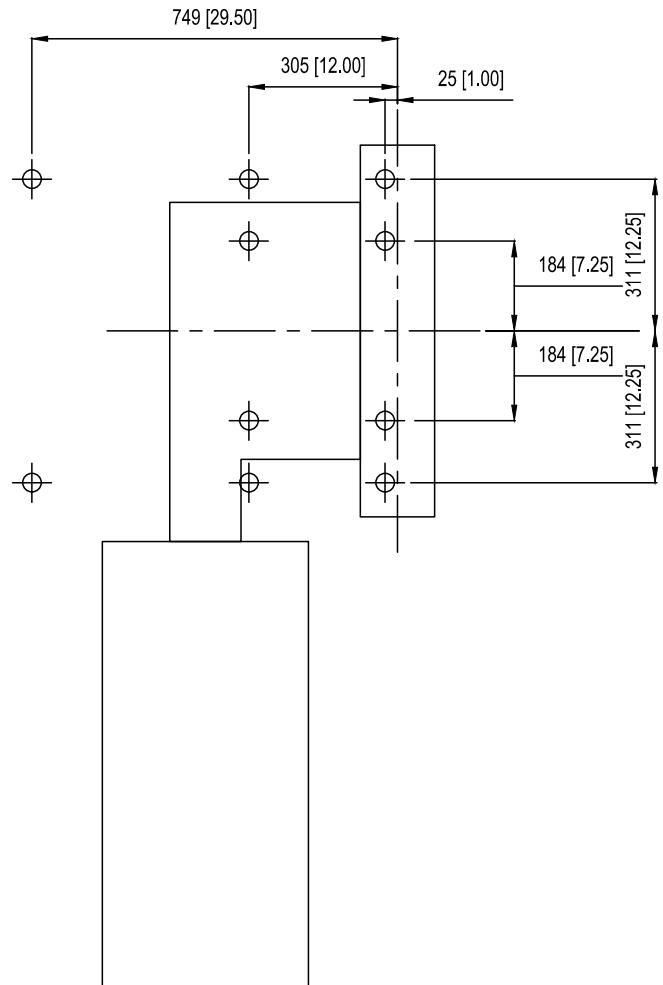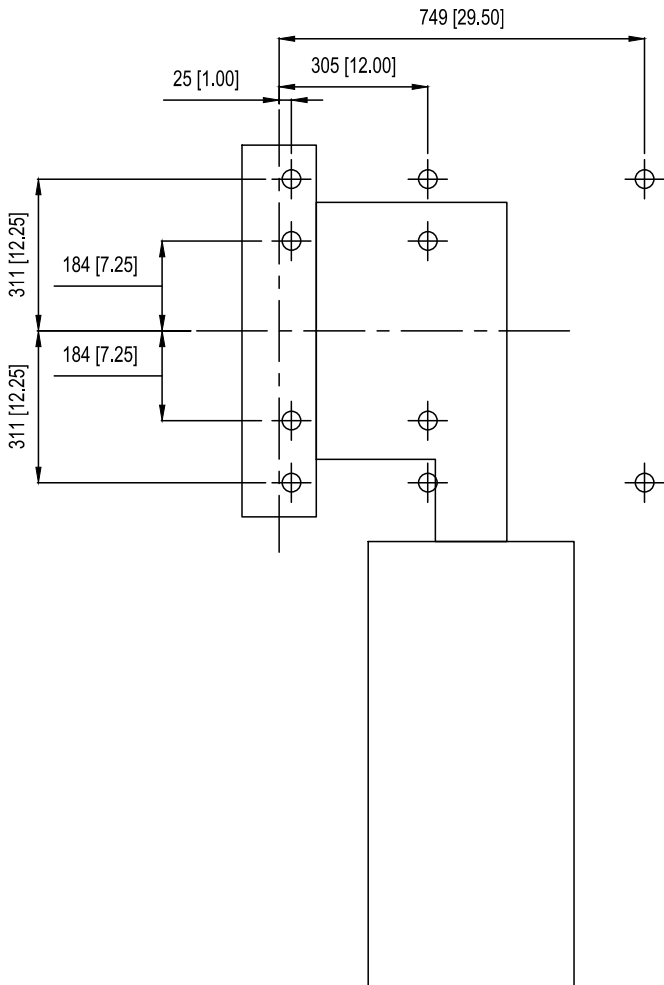

**Please confirm all dimensions above are accurate.**

**All measurements are taken from the sheave centerline and sheave shaft centerline.**

**SES cannot be held responsible if on-site conditions differ from drawing above unless revised anchor drawing is approved.**

# TORINDRIVE

NORTH AMERICA

A Brand of HYPERION


| Basement Inputs (required for all configurations) |  |
|---|--|
| Basement Configuration (see pages 7-9)            |  |
| Machine Hand                                      |  |
| Existing Machine / Anchor Pattern                 |  |
| Existing Anchor Bolt Height                       |  |
| Existing Anchors Fully Threaded                   |  |
| Existing Sheave Diameter                          |  |
| Existing Rope Diameter                            |  |
| Existing Rope Number                              |  |
| Existing Pitch                                    |  |
| A Configuration Inputs                            |  |
| MR1   |  |
| MR2   |  |
| MR3   |  |
| MR4   |  |
| B Configuration Inputs                            |  |
| MR1   |  |
| MR2   |  |
| MR3   |  |
| DF1   |  |
| DF2   |  |
| RD  |  |
| C Configuration Inputs                            |  |
| MR1   |  |
| MR2   |  |
| MR3   |  |
| DF1   |  |
| DF2   |  |
| DF3   |  |
| DF4   |  |

# TORINDRIVE


NORTH AMERICA

A Brand of HYPERION


| Overhead / Deflector / Compounding Sheave |  |  |  |  |  |
|---|--|--|--|--|--|
| Location                                  |  |  |  |  |  |
| Sheave Type                               |  |  |  |  |  |
| Quantity                                  |  |  |  |  |  |
| Sheave Diameter, D                        |  |  |  |  |  |
| Max Allowable Width, W (in)               |  |  |  |  |  |
| Required Shaft Diameter, d (in) (if any)  |  |  |  |  |  |
| Shaft Type                                |  |  |  |  |  |
| L1  |  |  |  |  |  |
| L2  |  |  |  |  |  |
| L3  |  |  |  |  |  |
| L4  |  |  |  |  |  |
| L5  |  |  |  |  |  |
| L6  |  |  |  |  |  |



A  
Deflector (<90° Wrap)




B  
90° Wrap




C  
180° Wrap

Shaft Type A



Shaft Type B

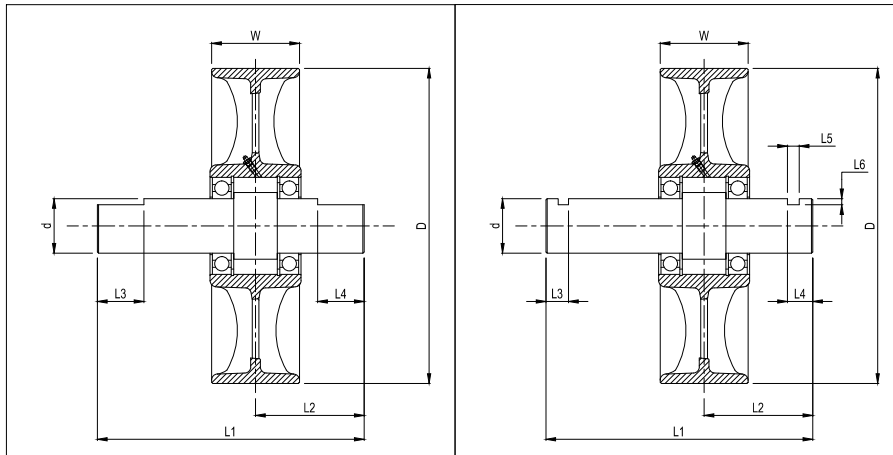

### Basement Configuration A

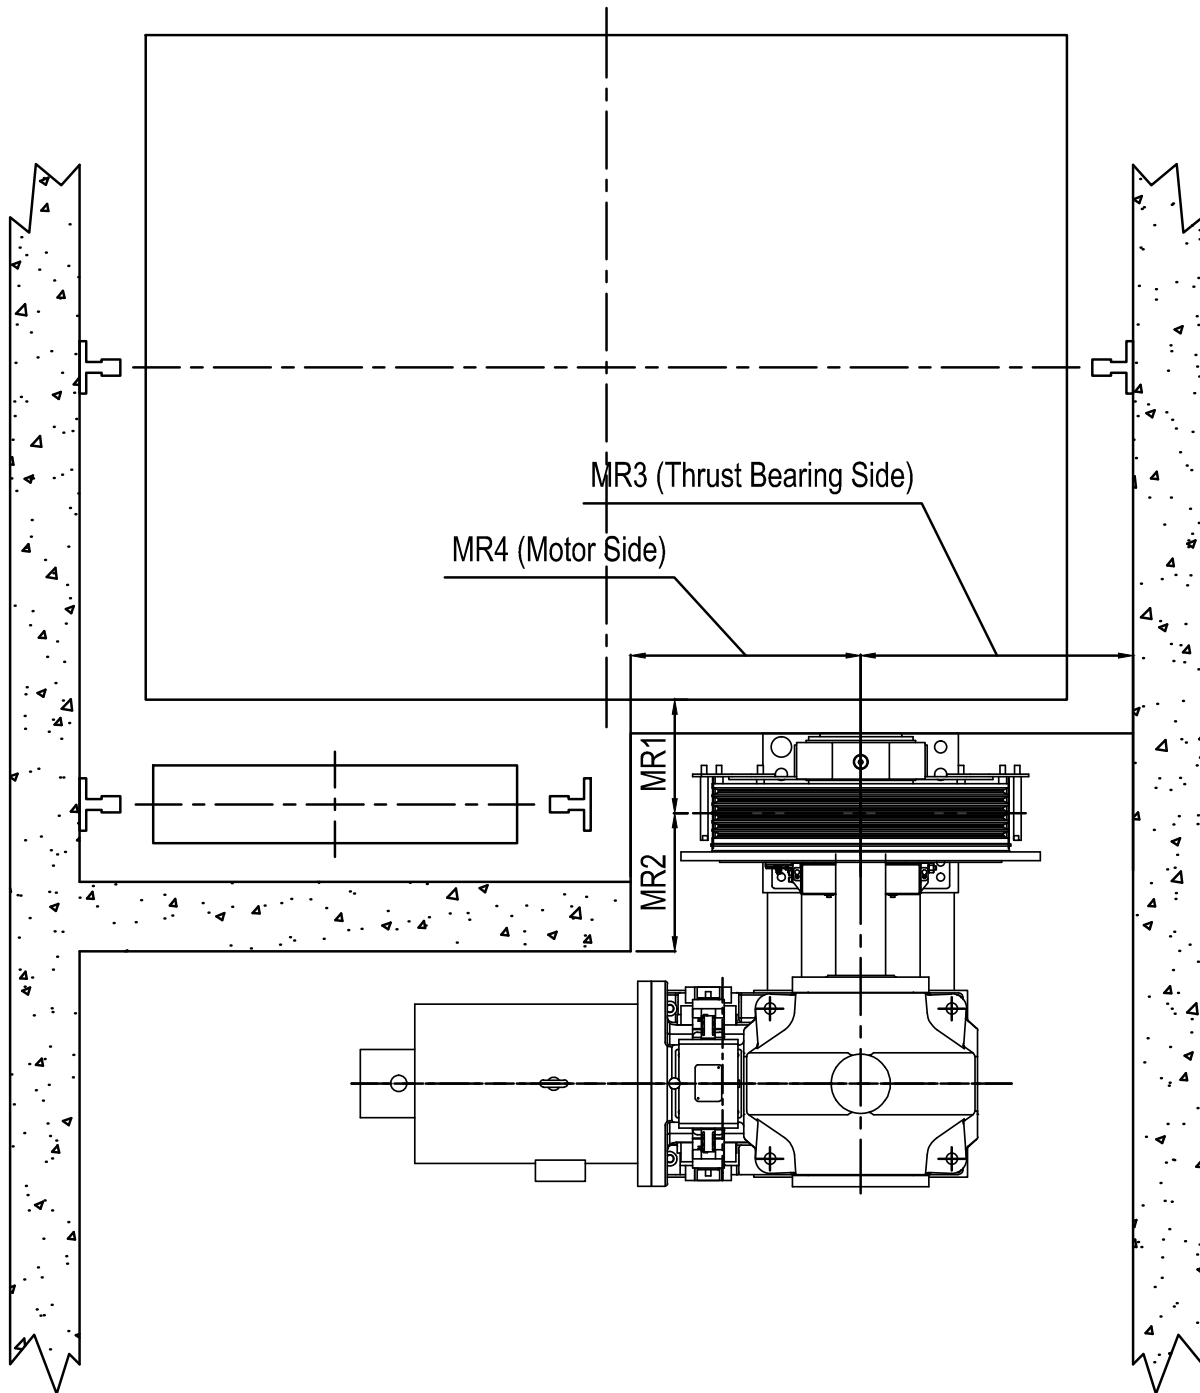

### Basement Configuration B

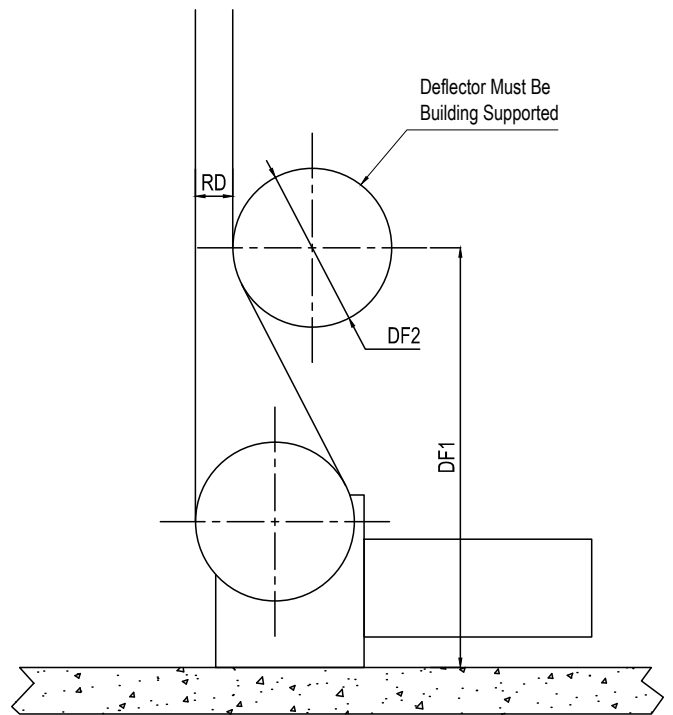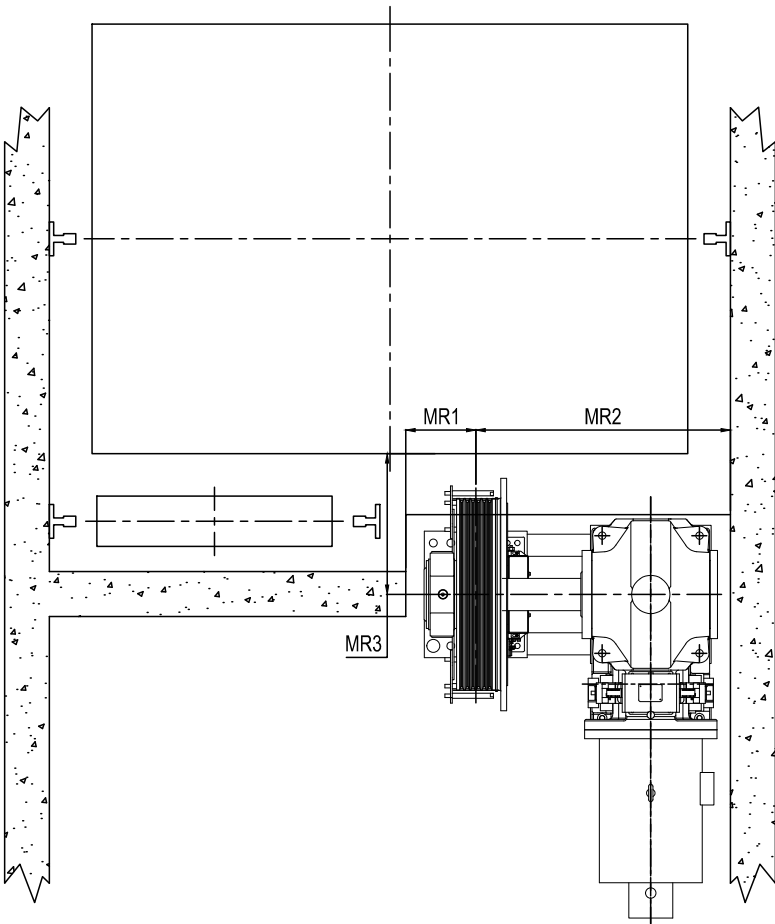



### Basement Configuration C

